

BIRCH, STEWART, KOLASCH & BIRCH, LLP

INTELLECTUAL PROPERTY LAW
8110 GATEHOUSE ROAD
SUITE 500 EAST
FALLS CHURCH, VA 22042-1210
U S A
(703) 205-8000

FAX: (703) 205-8050
(703) 698-8590 (G IV)

e-mail: mailroom@bskb.com
web: <http://www.bskb.com>

CALIFORNIA OFFICE:
COSTA MESA, CALIFORNIA

THOMAS S. AUCHTERLONIE
JAMES T. ELLER, JR.
SCOTT L. LOWE
MARK J. NUEL, Ph.D.
D. RICHARD ANDERSON
PAUL C. LEWIS
MARK W. MILSTEAD*
JOHN CAMPA*
RICHARD J. GALLAGHER

REG. PATENT AGENTS
FREDERICK R. HANDREN
MARYANNE ARMSTRONG, Ph.D.
MAKI HATSUMI
MIKE S. RYU
CRAIG A. McROBBIE
GARTH M. DAHLEN, Ph.D.
LAURA C. LUTZ
ROBERT E. GOOZNER, Ph.D.
HYUNG N. SOHN
MATTHEW J. LATTIG
ALAN PEDERSEN-GILES
JUSTIN D. KARJALA
C. KEITH MONTGOMERY
TIMOTHY R. WYCKOFF
HERMES M. SOYEZ, Ph.D.
KRISTIL RUPERT, Ph.D.

TERRELL C. BIRCH
RAYMOND C. STEWART
JOSEPH A. KOLASCH
JAMES M. SLATTERY
BERNARD L. SWEENEY*
MICHAEL K. MUTTER
CHARLES GORENSTEIN
GERALD M. MURPHY, JR.
LEONARD R. SVENSSON
TERRY L. CLARK
ANDREW D. MEIKLE
MARC S. WEINER
JOE MCKINNEY MUNCY
ROBERT J. KENNEY
DONALD J. DALEY
JOHN W. BAILEY
JOHN A. CASTELLANO, III
GARY D. YACURA

OF COUNSEL
HERBERT M. BIRCH (1905-1996)
ELLIOT A. GOLDBERG*
WILLIAM L. GATES*
EDWARD H. VALANCE*
RUPERT J. BRADY (RET)*
F. PRINCE BUTLER
FRED S. WHISENHUNT

*ADMITTED TO A BAR OTHER THAN VA

jc869 U.S. PTO
09/617088

07/14/00

Date: July 14, 2000

Docket No.: 0465-0719P

Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): HONG, Seong P.
PARK, Sang O.; JEON, Hyung J.

For: TRACK JUMP METHOD

Enclosed are:

- ☒ X A specification consisting of 25 pages
- ☒ X 11 sheet(s) of Formal drawings
- ☒ X An assignment of the invention
- ☒ X Certified copy of Priority Document(s)
- ☒ X Executed Declaration ☒ X Original ☐ Photocopy
- ☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27
- ☐ Preliminary Amendment
- ☐ Information Disclosure Statement, PTO-1449 and reference(s)

Other _____

The filing fee has been calculated as shown below:

LARGE ENTITY				SMALL ENTITY	
FOR	NO. FILED	NO. EXTRA	RATE FEE		RATE FEE
BASIC FEE	***** ***** *****	***** ***** *****	***** ***** \$690.00 *****	or	***** ***** \$345.00 *****
TOTAL CLAIMS	21 - 20 =	1	x18 =\$ 18.00	or	x 9 = \$ 0.00
INDEPENDENT	4 - 3 =	1	x78 =\$ 78.00	or	x 39 = \$ 0.00
MULTIPLE DEPENDENT CLAIM PRESENTED <u>no</u>			+260 = \$ 0.00	or	+130 = \$ 0.00
TOTAL \$ 786.00				TOTAL \$ 0.00	

X A check in the amount of \$ 826.00 to cover the filing fee and recording fee (if applicable) is enclosed.

_____ Please charge Deposit Account No. 02-2448 in the amount of \$ _____. A triplicate copy of this transmittal form is enclosed.

_____ No fee is enclosed.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. 1.16 or under 37 C.F.R. 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By _____

TERRY L. CLARK

Reg. No. 32,644

P. O. Box 747

Falls Church, Virginia 22040-0747

(703) 205-8000
TLC/dpt

004700-00047000

For: TRACK JUMP METHOD

L E T T E R

July 14, 2000
0465-0719P

Sir:

Under the provisions of 35 USC 119 and 37 CFR 1.55(a), the applicant hereby claims the right of priority based on the following application(s):

<u>Country</u>	<u>Application No.</u>	<u>Filed</u>
REPUBLIC OF KOREA	P1999-28978	07/16/99
REPUBLIC OF KOREA	P1999-28979	07/16/99
REPUBLIC OF KOREA	P1999-28980	07/16/99

A certified copy of the above-noted application(s) is(are) attached hereto.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. 1.16 or under 37 C.F.R. 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By :

~~TERRY L. CLARK~~

Reg. No. 32,644

P. O. Box 747

Falls Church, Virginia 22040-0747

Attachment
(703) 205-8000
/dpt

	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

TRACK JUMP METHOD

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a track jump on an optical recording and reproducing medium, and more particularly, to a method of performing a track jump without being influenced by a header.

2. Description of the Related Art

Generally, an optical recording medium system, i.e., an optical recording and reproducing apparatus, employs an optical disc as a recording medium and reproduces data recorded on the disc or records data on the disc.

A tracking servo in the optical recording and reproducing apparatus detects a tracking error signal corresponding to a beam tracing state and shifts an objective lens and the body of an optical pickup based on the signal to modify the location of a beam and follow up a predetermined track.

At this time, a track jump is essential to a time search or a variable bit rate (VBR) operation. When the number of tracks to be jumped is small, a track is searched for using a tracking actuator.

FIG. 1 is a block diagram of a typical optical recording/reproducing apparatus capable of performing a track jump. An optical pickup (P/U) 102 makes a light beam focused on an objective lens be put on a signal track on an optical disc 101 under control of a servo controller 106 and focuses light reflected from a signal recording side on the objective lens. Then, the P/U 102 makes the light focused on the objective lens be incident on an optical detector (not shown) to detect a focus error signal and a tracking error signal.

The optical detector is composed of a plurality of optical detecting devices. An electric signal proportional to the amount of light obtained from the optical detecting devices is output to a radio frequency (RF) and servo error generator 104. The RF and servo error generator 104 detects an RF signal for reproduction of data and a focus error signal FE and a tracking error signal TE for servo control, from the electric signal output from the optical detector. The RF signal is output to a decoder 105 for reproduction, and servo error signals, i.e., FE and TE, are output to the servo controller 106. A control signal for recording of data is output to an encoder 103.

The encoder 103 codes data to be recorded in a recording pulse having a format required by the optical disc 101 and records the coded data on the optical disc 101 through the P/U 102. The decoder 105 reconstructs original data from the RF signal.

A host such as a personal computer may be connected to the optical recording/reproducing apparatus. The host transmits a recording/reproducing command to a microcomputer 111 through an interface unit 110 of the optical recording/reproducing apparatus, transmits the data to be recorded to the encoder 103 and receives the reconstructed data from the decoder 105. The microcomputer 111 controls the encoder 103, the decoder 105 and the servo controller 106 according to the recording/reproducing command of the host.

For the interface unit 110, an advanced technology attached packet interface (ATAPI) unit is typically used. The ATAPI is a specification for interfacing an optical recording/reproducing apparatus such as a compact disc (CD) drive or a digital versatile disc (DVD) drive with a host. The ATAPI is proposed for transmitting data decoded in the optical recording/reproducing apparatus to the host. The ATAPI converts the decoded data into a protocol in a packet format which can be processed by the host, before transmission.

The servo controller 106 processes the focus error signal FE to output a driving signal for focusing control to a focus servo driver 107 and processes the tracking error signal TF to output a driving signal for tracking control to a tracking servo driver 108.

The focus servo driver 107 drives a focus actuator within the P/U 102 to thereby shift the P/U 102 up or down so that the P/U 102 can follow up the rotating optical disc 101 with an up-and-down motion.

The tracking servo driver 108 drives a tracking actuator within the P/U 102 to thereby shift the objective lens of the P/U 102 in a radial direction so that the location of a beam can be modified, and a predetermined track is followed.

When the optical disc 101 is a rewritable disc, particularly, a digital versatile disc random access memory (DVD-RAM), since there is no information on an initial disc, disc control and recording cannot be performed. To overcome this problem, disc tracks are formed on land and grooves to allow information to be recorded on each track, and sector addresses and control information for random access and rotation control are separately recorded on the disc, thereby allowing tracking control to be executed on a blank disc which an information signal is not recorded on. The control information may be recorded in the beginning of each sector by pre-formatting a header area or may be recorded in wobbling shape along each track. The wobbling means that information to be applied to a disc by modulating a certain clock, for example, information on a certain location and information on the rotational speed of a disc, is supplied to the power of a laser diode, so that control signal is recorded at the boundary surface between tracks by a variation of the light beam of the corresponding laser.

For example, in the case of a DVD-RAM, a header area which is pre-formatted at the beginning of each sector is composed of four header fields HD1 through HD4, as shown in FIG. 2(a). The header fields HD1/2 and the header fields HD3/4 are offset from the center of a track in an opposite direction to each other. In other words, the phase of the header fields HD1/2 is reverse to the phase of the header fields HD3/4, and the phase of a tracking error signal detected from the header fields HD1/2 is reverse to the phase of a tracking error signal detected from the header fields HD3/4. In addition, referring to FIG. 2(a), it can be known that the track boundary of a user area in which actual data is recorded has a wobbling shape.

Accordingly, a header mask is put on a header area, as shown in FIG. 2(b), and a track error signal is held during a track servo to prevent deviation from a track center.

To generate a header mask signal indicating a header area, the header area should be detected first.

Various methods can be used for detecting the header area, and one of them is using a wobble signal as shown in FIGS. 2(a) through 2(c).

More specifically, since the number of wobble signals in each sector is fixed, the header area is detected by counting the number of wobble signals. Since a wobble signal may not be detected due to a defect on a disc, the header area is detected by counting clocks, i.e., phase locked loop (PLL)-wobbles, in which wobble signals actually recorded on the disc are subjected to a PLL, as shown in FIG. 2(c), and a header mask signal (H/M) is generated as shown in FIG. 2(b).

For example, PLL-wobble signals are counted starting from a falling point of a previous header mask signal. When a predetermined number has been counted, it is determined that a header area begins, and thus a header mask signal is generated.

Since a wobble signal is not recorded in the header area, no wobble signal is detected from the header area. Accordingly, a wobble is omitted in a header area. When a wobble signal detected is subjected to a PLL without considering the omission of a wobble signal, a PLL-wobble signal elongates. This causes a header mask signal to be generated lagging behind an actual header area, that is, generation of a header mask signal is delayed.

To solve this problem, a PLL-wobble signal is held with a tracking error signal in a header area.

When a track jump command is input, the RF and servo error generator 104 detects an RF signal (shown in FIG. 3(d)) and a tracking error signal TE (shown in FIG. 3(a)) through the P/U 102 in a state in which only a focus servo is on, and simultaneously, the servo controller 106 generates a kick pulse (or a jump pulse) as shown in FIG. 3(c). The kick pulse is applied to the

tracking actuator through the tracking servo driver 108. When the kick pulse is applied to the tracking actuator, the speed of the tracking actuator increases, and the objective lens of the tracking actuator is pushed toward a track jump direction by acceleration of the tracking actuator.

At this time, a brake pulse is applied to the actuator at a zero cross point of the tracking error signal for a predetermined brake time to reduce the speed of the actuator. In other words, the tracking actuator is accelerated by the kick pulse and then decelerated by the brake pulse. The brake pulse is an inverted one of the kick pulse and is generated to stably stop the actuator at an exact desired location. When the brake time previously set has elapsed, a tracking servo is turned on.

A track zero crossing (TZC) signal which is turned on/off at the zero cross point of the tracking error signal TE, as shown in FIG. 3(b), is used as a reference signal for determining a kick pulse, brake pulse and a brake on time during a track jump. In other words, the TZC signal is used as a reference signal when determining at what point the brake pulse will be generated after the kick pulse is generated.

When the tracking actuator passes a header area (see the circled part in FIG. 3(a)) during a track jump, the TZC signal may be generated prior to or behind a desired location due to a header, or one more pulse of the TZC signal may be generated as shown in the circled part in FIG. 3(b).

Accordingly, when the optical disc 101 includes header areas like a DVD-RAM, a problem may occur due to a header area during a track jump.

In other words, when the TZC signal is generated prior to or behind a desired location, or when more pulses of the TZC signal than is desired are generated, the TZC signal goes beyond a location where it is originally supposed to be generated, and a kick time, brake time and a servo on time become irregular so that a track jump cannot be exactly and stably performed.

In addition, as shown in FIG. 4(a), when a track jump is performed depending on a track jump command, a wobble signal may not be detected since the tracking actuator crosses tracks.

Since a wobble signal is omitted, as shown in FIGS. 4(d) through 4(g), during a track jump, a PLL-wobble signal elongates. A wobble signal recorded on an actual disc is shown in FIG. 4(d). The part in the circle of FIG. 4(d) is enlarged in FIG. 4(f). The PLL-wobble signal, in which a wobble signal detected as shown in FIG. 4(d) is subjected to a PLL, is shown in FIG. 4(e). The part in the circle of FIG. 4(e) is enlarged in FIG. 4(g). A header area is indicated through an RF signal of FIG. 4(b). The RF signal corresponding to the header area is always higher than a certain level. The RF signal has the same phase with respect to the header fields HD1/2 and the header fields HD3/4.

As shown in FIG. 4(c), a rising point of a header mask signal, that is generated after a track jump, lags behind the actual location of a header area. Consequently, the header area cannot be masked so that a tracking error signal cannot be held in the header area. Accordingly, the tracking error signal becomes larger as shown in the circled part of FIG. 4(a), and the actuator follows up the header.

When the actuator follows up the header, track slippage may occur, and a track servo becomes unstable due to a change in a discrete track error. The unstable track servo deteriorates recording and reproducing characteristics.

In other words, a header area that comes first after a track jump is performed cannot be stably masked so that the system can be unstable due to a header during the track jump.

SUMMARY OF THE INVENTION

To solve the above problems, a first object of the present invention is to provide a method for performing a track jump without being influenced by a header area.

A second object of the present invention is to provide a track jump method of inhibiting a wobble signal from being subjected to a phase locked loop (PLL) and holding a previous PLL-wobble signal during a track jump.

A third object of the present invention is to provide a track jump method of generating a header mask signal using a signal that is not influenced by a wobble period during a track jump and for a predetermined period of time after the track jump.

In order to achieve the above objects, the present invention provides a track jump method including the steps of receiving a track jump command; checking whether a current location is the end of a header area when the track jump command is received; standing by without performing a track jump when the current location is not the end of the header area and performing the track jump with inhibition of a PLL of a wobble signal when the current location is the end of the header area; and resuming the PLL of the wobble signal when the track jump is completed.

The checking step determines an off-point of a header mask signal indicating a header area as the end point of the header area.

The PLL inhibiting step inhibits the PLL of the wobble signal and holds a PLL-wobble signal to a value obtained before the track jump is performed.

The PLL inhibiting step slices a sum of or a difference between optical reflected signals from the optical recording medium at a certain level to generate a header mask signal indicating a header area.

The PLL inhibiting step counts wobble signals subjected to the PLL to generate a header mask signal indicating a header area.

The PLL resuming step counts wobble signals subjected to the PLL to generate a header mask signal indicating a header area when the track jump is completed.

The PLL inhibiting step inhibits the PLL of the wobble signal in a section in which a header mask signal is on.

The PLL resuming step terminates the track jump before a point at which a header mask signal indicating a header area is turned on.

In another embodiment, a track jump method includes the steps of receiving a track jump command; checking whether a current location is the end of a header area when the track jump command is received; and performing a track jump when the current location is the end of the header area and standing by without performing the track jump until the header area ends when the current location is not the end of the header area.

When an N-time consecutive track jump command is received, a procedure of starting the track jump at a falling edge of a header mask signal, ending the track jump before a rising edge of the header mask signal, and turning on a servo is repeated N times.

In still another embodiment, a track jump method includes the steps of performing a track jump with inhibition of a PLL of a wobble signal when a track jump command is received; and resuming the PLL of the wobble signal when the track jump is completed.

In another embodiment, a track jump method includes the steps of masking a header area using a first header mask signal indicating the header area during a track jump; and masking a header area using a second header mask signal indicating the header area during normal recording/reproducing, wherein the first header mask signal is not influenced by a wobble period.

The first header mask signal is generated by slicing a sum of or a difference between optical reflected signals from the optical recording medium at a certain level.

The second header mask signal is generated by counting wobble signals subjected to the PLL.

The track jump method further includes the step of masking a header area using the first header mask signal until a wobble signal is normally detected after the track jump is completed.

BRIEF DESCRIPTION OF THE DRAWINGS

The above objects and advantages of the present invention will become more apparent by describing in detail preferred embodiments thereof with reference to the attached drawings in which:

FIG. 1 is a block diagram of a typical optical recording/reproducing apparatus;

FIGS. 2(a) through 2(c) are timing diagrams showing generation of a header mask during a normal servo;

FIGS. 3(a) through 3(d) are timing diagrams showing a tracking error signal and a track zero crossing (TZC) signal in the case where a header area exists during a track jump performed in FIG. 1 and are timing diagrams related to the track jump;

FIGS. 4(a) through 4(g) are timing diagrams showing the track jump performed in FIG. 1;

FIG. 5 is a block diagram of a configuration for performing a track jump according to a first embodiment of the present invention;

FIG. 6 is a flowchart of a track jump according to the first embodiment of the present invention;

FIGS. 7(a) through 7(f) are timing diagrams for showing the processes of a track jump according to the present invention;

FIGS. 8(a) through 8(e) are timing diagrams of a tracking error signal and a TZC signal which are generated when N track jumps are performed avoiding a header area according to the first embodiment of the present invention, and are timing diagrams related to the track jump;

FIG. 9 is a block diagram of a configuration for performing a track jump according to a second embodiment of the present invention;

FIG. 10 is a flowchart of a track jump according to the second embodiment of the present invention; and

FIGS. 11(a) through 11(c) are timing diagrams for showing the processes of a track jump according to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

004720-88027960

5 The present invention is characterized by that a track jump is performed at a falling point of a header mask signal to avoid a header area, and a track jump operation is held before the falling point even if a track jump command is generated. The header mask signal indicates the header area. Various methods of detecting a header area and generating a header mask signal have been proposed. A header mask signal may be generated using a phase locked loop (PLL)-wobble signal which is generated by subjecting a wobble signal formed in wobbling shape on a track to a PLL. Alternatively, a header mask signal may be generated using a read channel 1 signal or a read channel 2 signal.

10 In a first embodiment of the present invention, during a track jump, a wobble signal is inhibited from being subjected to a PLL, a previous PLL-wobble signal is held, and a header mask signal is generated using the held PLL-wobble signal.

In a second embodiment of the present invention, during a track jump, a header mask signal is generated using a read channel 1 signal or a read channel 2 signal, and after completion of the track jump, a header mask signal is generated using a PLL-wobble signal.

15 In the present invention, it is assumed that a header area is defined by a "high" level of a header mask signal, and a data recordable area is defined by a "low" level of the header mask signal. The falling point of the header mask signal indicates the end of a header area.

FIRST EMBODIMENT

20 FIG. 5 is a block diagram showing a configuration for performing a track jump method according to the first embodiment of the present invention. Only portions related to the track jump are illustrated.

25 Referring to FIG. 5, the configuration includes an optical disc 201 to which data can be rewritten, an optical pickup (P/U) 202 for recording and reproducing information to and from the optical disc 201, a radio frequency (RF) and servo error generator 203 for generating an RF (or a read channel 1) signal and servo error signals, such as a read channel 2 signal, a tracking error signal and a focus error signal. from an electric signal output from the P/U 202, a sample and

hold unit 204 for holding the tracking error signal and the focus error signal, which are generated by the RF and servo error generator 203, in a header area, a servo controller 205 for individually processing the focus error signal and the tracking error signal, which have been held or bypassed by the sample and hold unit 204, to generate a focus driving signal and a tracking driving signal, a microcomputer 206 for controlling a track jump, a servo signal generator 207 for generating a header mask (H/M) signal and an L/G switching signal and controlling a PLL of a wobble signal according to a jump hold signal J_hold output from the microcomputer 206, a wobble PLL unit 208 for inhibiting a wobble signal from being subjected to a PLL and holding a previous PLL-wobble signal according to a hold signal Hold output from the servo signal generator 207, a focus servo driver 209 for receiving the focus driving signal from the servo controller 205 and driving a focus actuator within the P/U 202, and a tracking servo driver 210 for receiving the tracking driving signal from the servo controller 205 and driving a tracking actuator within the P/U 202.

When a track jump is performed in the first embodiment of the present invention having such configuration, the microcomputer 206 checks a falling point of a header mask signal output from the servo signal generator before outputting a track jump control command to the servo controller 205.

When a falling edge of the header mask signal is not detected, the microcomputer 206 holds the track jump control command until the falling edge is detected and outputs the track jump control command to the servo controller 205 when the falling edge of the header mask signal is detected.

The microcomputer 206 detects a track zero crossing (TZC) signal which is turned on/off at a zero cross point of the tracking error signal input through the servo controller 205 and outputs it to the microcomputer 206. The microcomputer 206 uses the TZC signal as a reference signal for controlling a kick pulse, brake pulse and a brake time during a track jump.

The microcomputer 206 also generates a jump hold signal J_hold for inhibiting a wobble signal from being subjected to a PLL and holding a previous PLL-wobble signal during a track jump and outputs it to the servo signal generator 207. When receiving the jump hold signal J_hold, the servo signal generator 207 outputs a hold signal Hold to the wobble PLL unit 208.

5 The servo signal generator 207 also outputs the hold signal Hold to the wobble PLL unit 208 during a normal servo, that is, during normal recording/reproducing, when a header area is detected.

10 The wobble PLL unit 208 generates a PLL-wobble signal by subjecting a wobble signal recorded on an actual disc to a PLL and outputs the PLL-wobble signal to the servo signal generator 207. During this operation, when the hold signal Hold is received from the servo signal generator 207, the wobble PLL unit 208 stops the PLL of the wobble signal and outputs a PLL-wobble signal that is held to a value obtained before the track jump operation to the servo signal generator 207.

15 The servo signal generator 207 counts PLL-wobble signals output from the wobble PLL unit 208, generates a header mask signal H/M and a land/groove switching signal L/G, and outputs them to the microcomputer 206.

FIG. 6 is a flowchart of an operation according to the present invention when the track jump command is input, and FIGS. 7(a) through 7(f) are timing diagrams during the operation.

20 When a disc is a rewritable disc, particularly, a digital versatile disc random access memory (DVD-RAM), FIGS. 7(a) through (f) show an example of a forward 2 track jump. In the case of a DVD-RAM, since data can be recorded on both land and groove tracks, two tracks are jumped during one period of a tracking error signal generated during a track jump, as shown in FIG. 7(a).

25 More specifically, when a track jump command is input in step 301, the servo signal generator 207 counts PLL-wobble signals output from the wobble PLL unit 208, generates a header mask signal, and outputs it to the microcomputer 206. In step 302, the microcomputer 206

checks a falling point of the header mask signal output from the servo signal generator 207 before performing a track jump, that is, before outputting a track jump control command to the servo controller 205. The falling point of the header mask signal is checked for the purpose of making a TZC signal not influenced by a header during the track jump.

Accordingly, when a falling edge of the header mask signal is not detected in step 302, the track jump control command is held until the falling edge is detected. When the falling edge of the header mask signal is detected, as shown in FIG. 7(c), the microcomputer 206 outputs the track jump control command to the servo controller 205, and simultaneously, outputs a jump hold signal J_hold in a "high" state, as shown in FIG. 7(d), to the servo signal generator 207 in step 303. In the present invention, it is assumed that the jump hold signal J_hold is in a "high" state during a track jump.

When receiving the jump hold signal J_hold in a "high" state, the servo signal generator 207 outputs a hold signal Hold in a "high" state to the wobble PLL unit 208. Here, it is assumed that the hold signal Hold for inhibiting a wobble PLL is in a "high" state.

Meanwhile, the servo signal generator 207 outputs the hold signal Hold to the wobble PLL unit 208 when a header area is detected during normal recording/reproducing. In other words, the servo signal generator 207 ORs the jump hold signal J_hold, as shown in FIG. 7(d), and the header mask signal H/M, as shown in FIG. 7(c), and outputs the result of ORing, as shown in FIG. 7(e), to the wobble PLL unit 208.

The wobble PLL unit 208 subjects a wobble signal recorded on a disc to a PLL to generate a PLL-wobble signal and outputs the generated PLL-wobble signal to the servo signal generator 207. During this operation, when the hold signal Hold in a "high" state, as shown in FIG. 7(e), is input from the servo signal generator 207, the wobble PLL unit 208 stops the wobble PLL operation of subjecting the wobble signal recorded on the disc to the PLL. Then, the wobble PLL unit 208 outputs a PLL-wobble signal which is held to a previous value, that is, a value obtained before reaching a header area in the case of a normal servo or a value obtained before

performing a track jump, to the servo signal generator 207. Accordingly, the PLL-wobble signal does not elongate and has a regular period during a track jump.

When the falling edge of the header mask signal is detected as described above, the microcomputer 206 outputs the jump hold signal J_hold to the servo signal generator 207, and simultaneously, checks a direction of a track jump for starting the track jump in step 304. In other words, it is determined whether a track jump is performed from an inner track to an outer track or from an outer track to an inner track.

When the track jump direction is determined in step 304, a kick pulse is generated toward the track jump direction and applied to a tracking actuator in step 305. When the kick pulse is generated in step 305, the speed of the tracking actuator increases, and an objective lens of the tracking actuator is pushed toward the track jump direction by acceleration of the tracking actuator. At this time, a TZC signal is detected.

Next, a brake pulse is applied to the tracking actuator at a rising edge of the TZC signal for a predetermined brake time to decelerate the tracking actuator in step 306. When the previously set brake time has elapsed, a tracking servo and a sled servo are turned on in step 307. In particular, the tracking servo and the sled servo are turned on after the track jump starts and before the header mask signal rises.

When the tracking servo and the sled servo are turned on step 307, the microcomputer 206 outputs the jump hold signal J_hold in a "low" state, as shown in FIG. 7(d), to the servo signal generator 207 in step 308.

When a falling edge of the jump hold signal J_hold is detected, the servo signal generator 207 outputs the hold signal Hold in a "low" state to the wobble PLL unit 208. Accordingly, when the falling edge of the hold signal Hold is detected, the wobble PLL unit 208 resumes a PLL of a wobble signal. In other words, holding of the PLL-wobble signal is interrupted, and an actual wobble signal is subjected to a PLL. Then, the wobble PLL unit outputs a PLL-wobble signal to the servo signal generator 207.

When it is determined that the track jump fails to reach a target track in step 309, the progress returns to the step 302, and the track jump is continued.

As described above, since the present invention starts a track jump avoiding a header area, a TZC signal is not influenced by a header, as shown in FIG. 7(b). Accordingly, the TZC signal does not lead or lag behind a desired location during the track jump. In addition, one more pulse of the TZC signal than a desired does not generated during the track jump. Consequently, an exact and stable track jump is achieved.

The present invention holds a PLL-wobble signal during a track jump to prevent the PLL-wobble signal from elongating during the track jump, thereby exactly generating a header mask signal in a header area after the track jump is completed. Accordingly, a header coming first after the track jump can be stably masked, thereby preventing a tracking error from being greater in a header area. Therefore, track slippage or unstable track servo can be prevented.

FIGS. 8(a) through 8(e) show waveforms when a 2-track jump is consecutively performed N times. The track jump is performed avoiding a header area as described above.

In other words, the track jump is started in synchronization with the falling edge of a header mask signal. Then, the 2-track jump is completed before a rising edge of the header mask signal, and then a servo is turned on. This procedure is repeated N times.

SECOND EMBODIMENT

FIG. 9 is a block diagram showing a configuration for performing a track jump method according to the second embodiment of the present invention. Only portions related to the track jump are illustrated.

Referring to FIG. 9, the configuration includes an optical disc 401 to which data can be rewritten, an optical pickup (P/U) 402 for recording and reproducing information to and from the optical disc 401, a RF and servo error generator 403 for generating a RF signal (or a read channel 1 signal R-ch1) and servo error signals such as a read channel 2 signal R-ch2, a tracking error signal TE and a focus error signal FE from an electric signal output from the P/U 402, a sample

and hold unit 404 for holding the tracking error signal and the focus error signal, which are generated by the RF and servo error generator 403, in a header area, a servo controller 405 for individually processing the focus error signal and the tracking error signal, which have been held or bypassed by the sample and hold unit 404, to generate a focus driving signal and a tracking driving signal, a microcomputer 406 for controlling a track jump according to the present invention, a first header mask (H/M) signal generator 407 for generating a first header mask signal indicating a header area using the read channel 1 signal or the read channel 2 signal, which is output from the RF and servo error generator 405, a wobble PLL unit 408 for subjecting a wobble signal output from the RF and servo error generator 403 to a PLL and outputting a PLL-wobble signal, a second H/M signal generator 409 for counting PLL-wobble signals output from the wobble PLL unit 408 and generating a second header mask signal indicating a header area, a H/M controller 410 for outputting either of the first header mask signal and the second header mask signal to the sample and hold unit 410 under control of the microcomputer 406, a focus servo driver 411 for receiving the focus driving signal from the servo controller 405 and driving a focus actuator within the P/U 402, and a tracking servo driver 412 for receiving the tracking driving signal from the servo controller 405 and driving a tracking actuator within the P/U 402.

FIG. 10 is a flowchart of an operation according to the second embodiment of the present invention when a track jump command is input, and FIGS. 11(a) through 11(c) are timing diagrams during the operation.

Like the first embodiment, when a disc is a rewritable disc, particularly, a DVD-RAM, FIGS. 11(a) through 11(c) show an example of a forward 2 track jump. In the case of a DVD-RAM, since data can be recorded on both land and groove tracks, two tracks are jumped during one period of a tracking error signal generated during a track jump, as shown in FIG. 11(a).

When a track jump is performed in the second embodiment of the present invention having such configuration, the microcomputer 406 outputs a track jump control command to the servo controller 405. When the track jump control command is input, the servo controller 405

detects a TZC signal which is turned on/off at a zero cross point of a tracking error signal and outputs it to the microcomputer 406 in step 501. The microcomputer 406 uses the TZC signal as a reference signal for controlling a kick pulse, brake pulse and a brake time during the track jump.

5 The microcomputer 406 switches a header mask mode J_mode in step 502. More specifically, the microcomputer 406 switches the header mask mode J_mode to a "high" state and outputs the switched J_mode to the H/M controller 410 in order to use a header mask signal generated by the first H/M generator 407.

10 In this embodiment, the H/M controller 410 selects a first header mask signal generated by the first H/M generator 407 when the J_mode is in a "high" state and selects a second header mask signal generated by the second H/M generator 409 when the J_mode is in a "low" state. The selected header mask signal is output to the sample and hold unit 404.

15 Here, the first H/M generator 407 may generate a header mask signal using a read channel 1 signal or a read channel 2 signal. For example, the header mask signal can be generated by slicing the read channel 1 signal or the read channel 2 signal at a certain level. In addition, when a header mask signal is not influenced by a wobble period, the header mask signal can be used as the first header mask signal.

20 Meanwhile, when the header mask mode J_mode is switched to the "high" state, the microcomputer 406 generates a kick pulse toward a track jump direction and applies it to a tracking actuator in step 503. When the kick pulse is generated in step 503, the speed of the tracking actuator increases, and an objective lens of the tracking actuator is pushed toward the track jump direction by acceleration. At this time, a TZC signal is detected.

25 Next, a brake pulse is applied to the tracking actuator at a rising edge of the TZC signal for a predetermined brake time to decelerate the tracking actuator in step 504. When the previously set brake time has elapsed, a tracking servo and a sled servo are turned on in step 505.

When the tracking servo and the sled servo are turned on step 505, it is determined whether a target track is reached in step 506. When it is determined that the target track is not reached, the progress returns to the step 503, and the above processes are repeated. When it is determined that the target track is reached, it is determined whether a PLL-wobble signal is normally and stably detected in step 507.

When it is determined that the PLL-wobble signal is not normally detected in step 507, a header mask signal H/M and a focus error signal FE are held using the first header mask signal until the PLL-wobble signal is normally detected. When the PLL-wobble signal is normally detected after a predetermined time has elapsed, the header mask mode J_mode is toggled from a "high" state to a "low" state in step 508. In other words, the header mask mode J_mode is switched to the "low" state, and the switched header mask mode J_mode is output to the H/M controller 410 in order to use a header mask signal generated by the second H/M generator 409. In another example of step 508, an enough time to compensate for elongation of the PLL-wobble signal is previously set, and a header mask mode J_mode is switched to a "low" state after the previously set time has elapsed.

Accordingly, the present invention can exactly generate a header mask signal in a header area after the track jump is completed, as shown in FIG. 11(c). In other words, a header coming first after the track jump can be stably masked, thereby preventing a tracking error from being greater in a header area, as shown in FIG. 11(a). Consequently, track slippage or an unstable track servo can be prevented, thereby allowing data to be recorded or reproduced in a stable servo.

Meanwhile, in the second embodiment of the present invention, the microcomputer 406 may check a falling point of the header mask signal output from the H/M controller 410 before performing a track jump, that is, before outputting a track jump control command to the servo controller 405 for the purpose of making a TZC signal not influenced by a header during the track jump. After a track jump command is input, when a falling edge of the header mask signal is not detected, the track jump control command is held until the falling edge is detected. When the

falling edge of the header mask signal is detected, the microcomputer 406 outputs the track jump control command to the servo controller 405, thereby starting the track jump.

In addition, to prevent a PLL-wobble signal from elongating, a wobble PLL in which an actual wobble signal is subjected to a PLL may be inhibited, and a PLL-wobble signal may be held to a value obtained before the track jump is performed, during the track jump. For this operation, when a track jump command is input, the microcomputer 406 outputs a hold signal Hold to the wobble PLL unit 408, and the wobble PLL unit 408 inhibits or resumes a wobble PLL according to the hold signal Hold. When a header area is detected during a normal servo, that is, during normal recording/reproducing, the microcomputer 406 also outputs the hold signal Hold to the wobble PLL unit 408.

Accordingly, the wobble PLL unit 408 outputs the PLL-wobble signal, in which a wobble signal recorded on an actual disc is subjected to the PLL, to the second H/M generator 409. During this operation, when the hold signal Hold is received from the microcomputer 406, the wobble PLL unit 208 stops the PLL of the wobble signal. Then, the wobble PLL unit 408 outputs a PLL-wobble signal which is held to a previous value, that is, a value obtained before reaching a header area in the case of a normal servo or a value obtained before performing the track jump, to the second H/M signal generator 409.

As described above, in a track jump method according to the present invention, once a track jump command is input, a track jump operation is held until a falling edge of a header mask signal is detected. The track jump starts at the falling edge of the header mask signal and ends before a rising edge of the header mask signal so that a TZC signal is not influenced by a header during the track jump. Therefore, the track jump can be exactly and stably performed. In particular, when the track jump command is input, a PLL of a wobble signal is inhibited, and a PLL-wobble signal is held to a previous value obtained before the track jump is performed, during the track jump. Therefore, a header coming first after the track jump is completed can be stably masked, thereby preventing a system from being unstable due to a header during the track

jump. In addition, once the track jump command is input, a header mask signal is generated using a read channel signal which is not influenced by a wobble period, until a wobble signal becomes stable after a track jump. During a normal servo, a header mask signal is generated using a PLL-wobble signal to mask a header area. Therefore, a header area coming first after the track jump is completed can be stably masked, thereby preventing a system from being unstable due to a header during the track jump.

The foregoing embodiments are merely exemplary and are not to be construed as limiting the present invention. The present teachings can be readily applied to other types of apparatuses. The description of the present invention is intended to be illustrative, and not to limit the scope of the claims. Many alternatives, modifications, and variations will be apparent to those skilled in the art.

What is claimed is:

1. A track jump method performed on an optical recording medium on which a plurality of header areas having different phases are disposed between recordable data areas, in which information for recognition of reference frequency is provided in wobbling shape on a track, to separate the data areas, the track jump method comprising the steps of:

receiving a track jump command;

checking whether a current location is the end of a header area when the track jump command is received;

standing by without performing a track jump when the current location is not the end of the header area and performing the track jump with inhibition of a phase locked loop (PLL) of a wobble signal when the current location is the end of the header area; and

resuming the PLL of the wobble signal when the track jump is completed.

2. The track jump method of claim 1, wherein the checking step determines an off-point of a header mask signal indicating a header area as the end point of the header area.

3. The track jump method of claim 1, wherein the PLL inhibiting step inhibits the PLL of the wobble signal and holds a PLL-wobble signal to a value obtained before the track jump is performed.

4. The track jump method of claim 1, wherein the PLL inhibiting step slices a sum of optical reflected signals from the optical recording medium at a certain level to generate a header mask signal indicating a header area.

5. The track jump method of claim 1, wherein the PLL inhibiting step slices a difference between optical reflected signals, which are divided in a track direction from the

optical recording medium, at a certain level to generate a header mask signal indicating a header area.

6. The track jump method of claim 1, wherein the PLL inhibiting step counts wobble signals subjected to the PLL to generate a header mask signal indicating a header area.

5 7. The track jump method of claim 1, wherein the PLL resuming step counts wobble signals subjected to the PLL to generate a header mask signal indicating a header area when the track jump is completed.

8. The track jump method of claim 1, wherein the PLL inhibiting step inhibits the PLL of the wobble signal in a section in which a header mask signal is on.

10 9. The track jump method of claim 1, wherein the PLL resuming step terminates the track jump before a point at which a header mask signal indicating a header area is turned on.

10. A track jump method performed on an optical recording medium on which a plurality of header areas having different phases are disposed between recordable data areas to separate the data areas, the track jump method comprising the steps of:

15 receiving a track jump command;

checking whether a current location is the end of a header area when the track jump command is received; and

performing a track jump when the current location is the end of the header area and standing by without performing the track jump until the header area ends when the current
20 location is not the end of the header area.

11. The track jump method of claim 10, wherein the checking step determines a falling point of a header mask signal indicating a header area as the end point of the header area.

12. The track jump method of claim 10, wherein the track jump performing step ends before a rising point of a header mask signal indicating a header area.

13. The track jump method of claim 10, wherein when an N-time consecutive track jump command is received, a procedure of starting the track jump at a falling edge of a header mask signal, ending the track jump before a rising edge of the header mask signal, and turning on a servo is repeated N times.

14. A track jump method performed on a disc on which a plurality of header areas having different phases are disposed between recordable data areas, in which information for recognition of reference frequency is provided in wobbling shape on a track, to separate the data areas, the track jump method comprising the steps of:

performing a track jump with inhibition of a phase locked loop (PLL) of a wobble signal when a track jump command is received; and

resuming the PLL of the wobble signal when the track jump is completed.

15. The track jump method of claim 14, wherein the PLL inhibiting step inhibits the PLL of the wobble signal and holds a PLL-wobble signal to a value obtained before the track jump is performed, during the track jump.

16. The track jump method of claim 14, wherein the PLL inhibiting step starts the track jump at a point where a header area ends when the track jump command is input.

17. The track jump method of claim 14, wherein the PLL inhibiting step inhibits the PLL of the wobble signal in a section in which a header mask signal is on.

18. A track jump method performed on an optical recording medium on which a plurality of header areas having different phases are disposed between recordable data areas, in which information for recognition of reference frequency is provided in wobbling shape on a track, to separate the data areas, the track jump method comprising the steps of:

masking a header area using a first header mask signal indicating the header area during a track jump; and

masking a header area using a second header mask signal indicating the header area during normal recording/reproducing,

wherein the first header mask signal is not influenced by a wobble period.

19. The track jump method of claim 18, wherein the first header mask signal is generated by slicing a sum of or a difference between optical reflected signals from the optical recording medium at a certain level.

20. The track jump method of claim 18, wherein the second header mask signal is generated by counting wobble signals subjected to the PLL.

21. The track jump method of claim 18, further comprising the step of masking a header area using the first header mask signal until a wobble signal is normally detected after the track jump is completed.

Abstract of the Disclosure

A track jump method for an optical recording/reproducing medium is provided. In the track jump method, once a track jump command is input, a track jump operation is held until a falling edge of a header mask signal is detected. The track jump starts at the falling edge of the header mask signal and ends before a rising edge of the header mask signal so that a TZC signal is not influenced by a header during the track jump. Therefore, the track jump can be exactly and stably performed. In particular, when the track jump command is input, a PLL of a wobble signal is inhibited, and a PLL-wobble signal is held to a previous value obtained before the track jump is performed, during the track jump, or a header mask signal is generated using a read channel signal which is not influenced by a wobble period, until a wobble signal becomes stable after a track jump. During a normal servo, a header mask signal is generated using a PLL-wobble signal to mask a header area. Therefore, a header area coming first after the track jump is completed can be stably masked, thereby preventing a system from being unstable due to a header during the track jump.

FIG. 1
Background Art

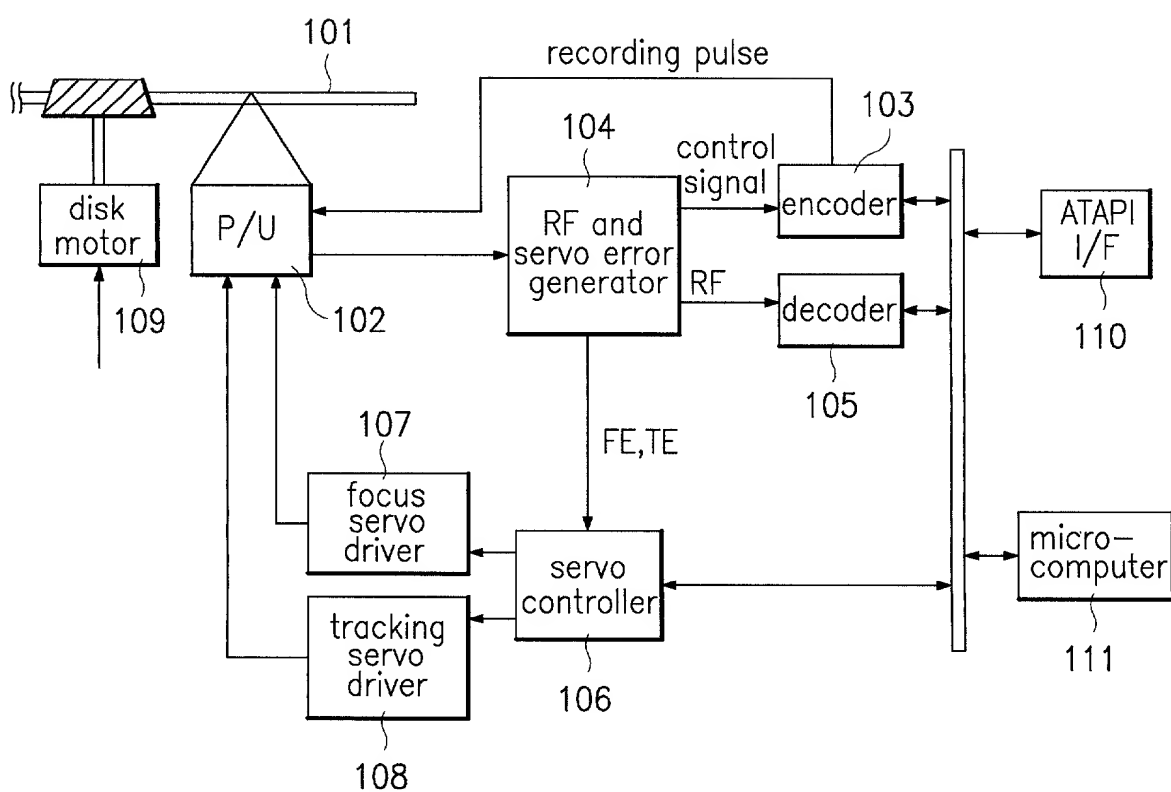


FIG.2
Background Art

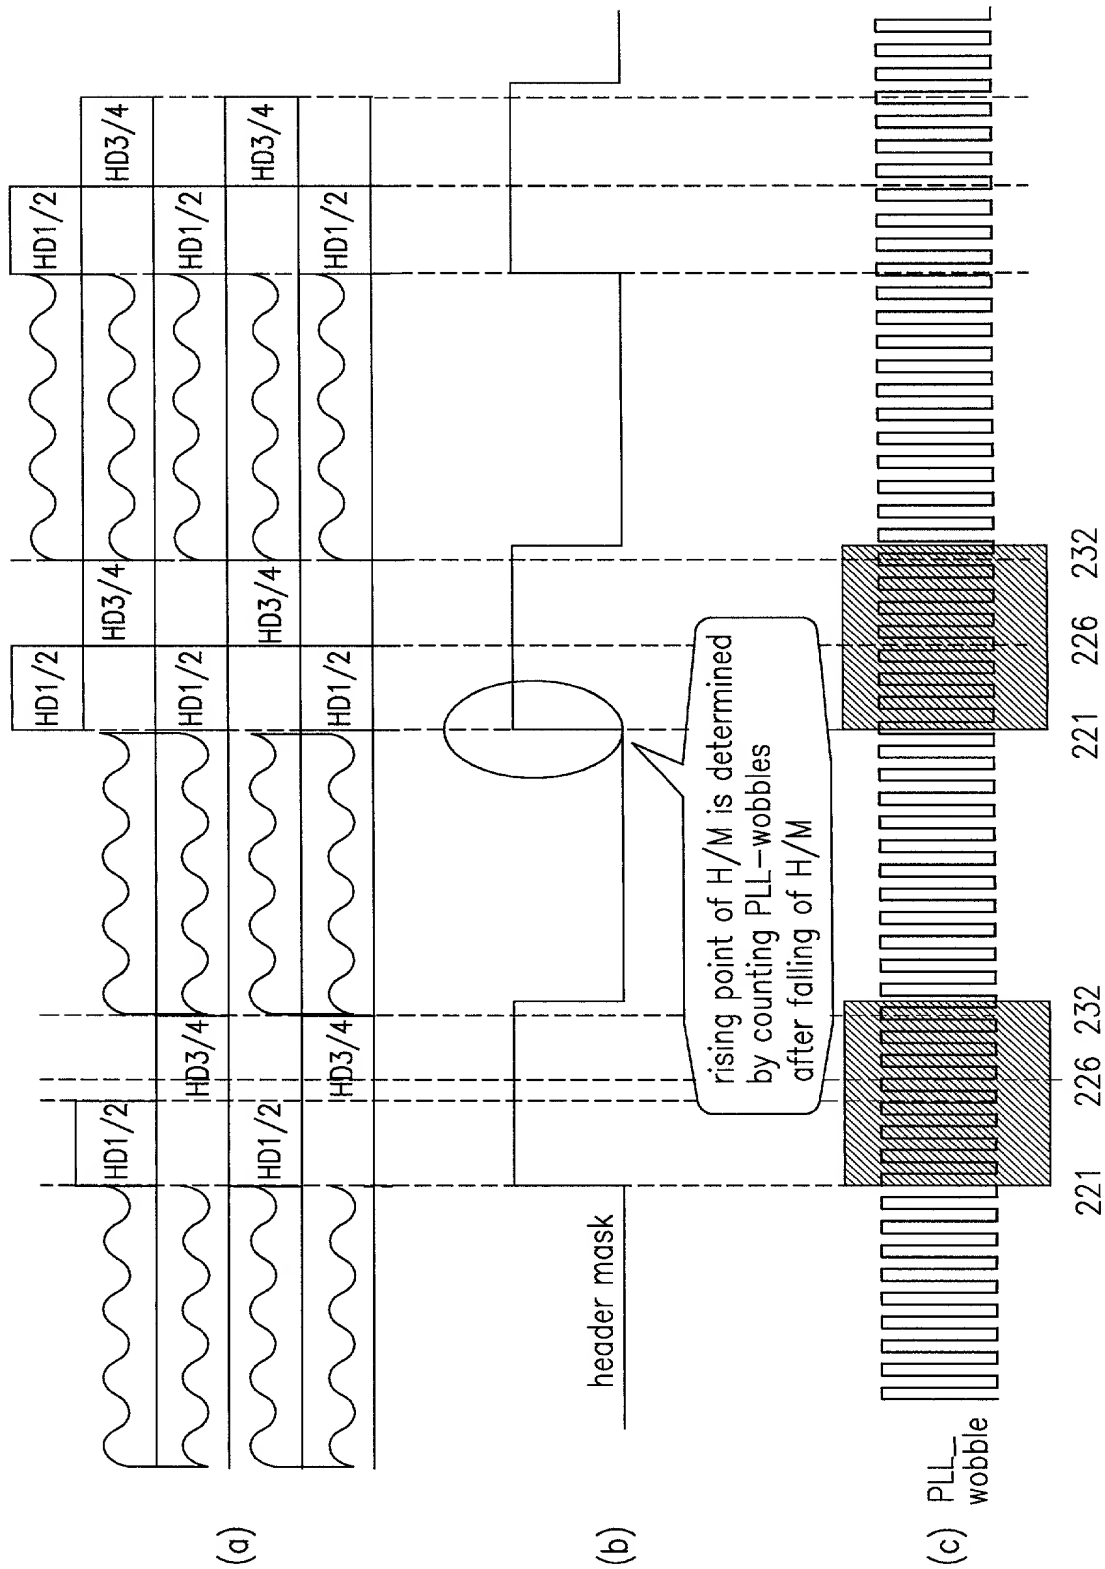


FIG.3
Background Art

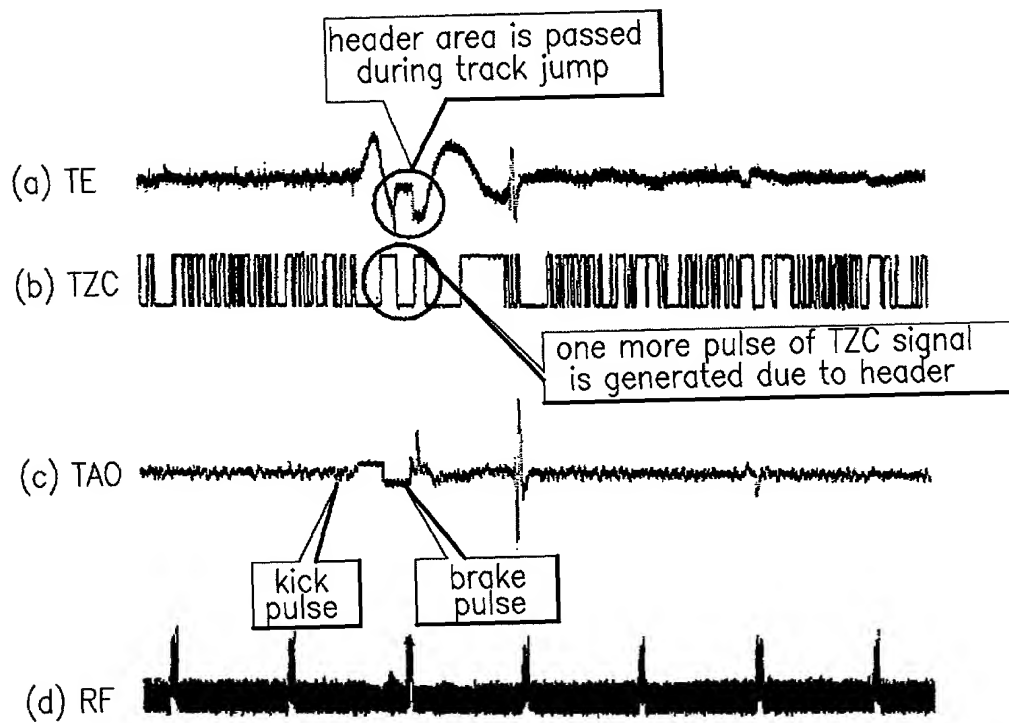


FIG.4
Background Art

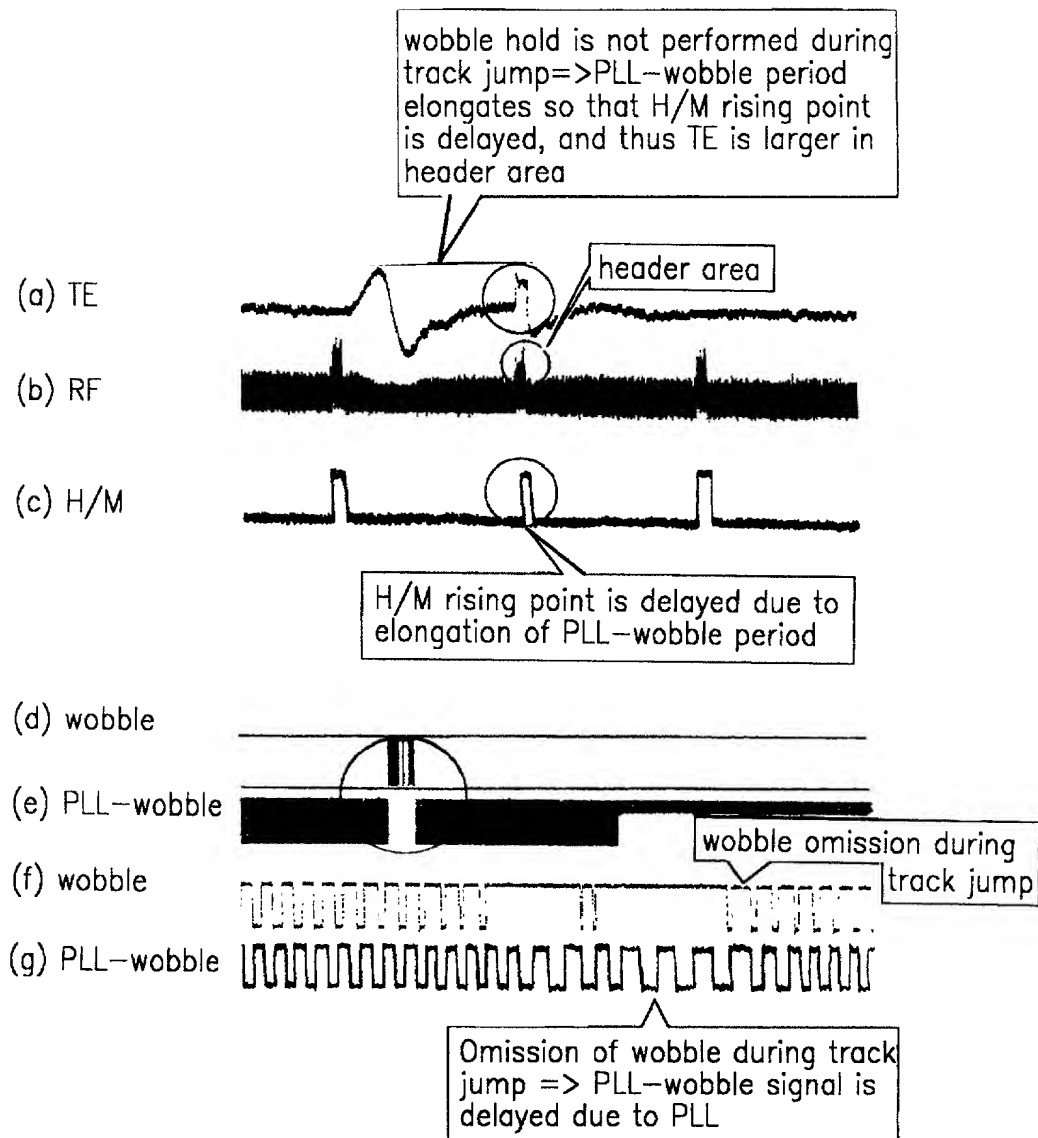


FIG.5

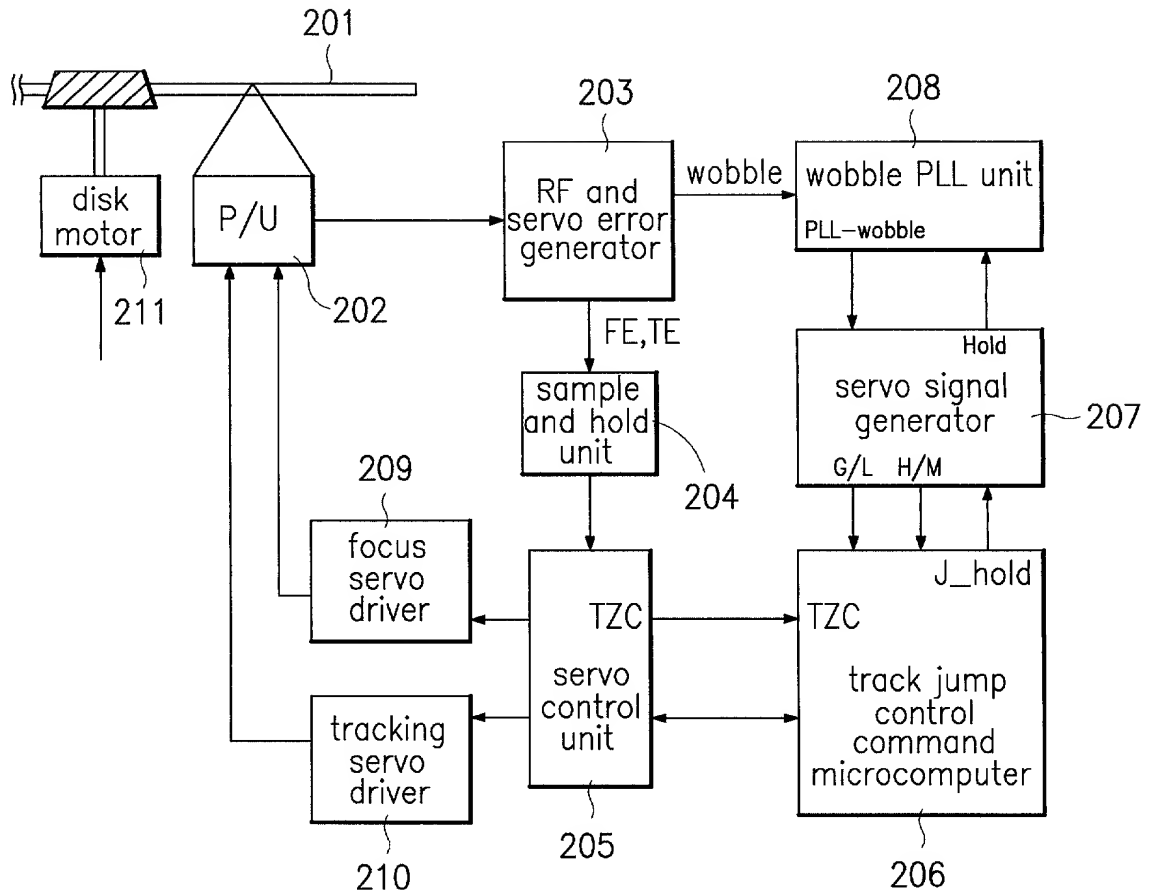


FIG.6

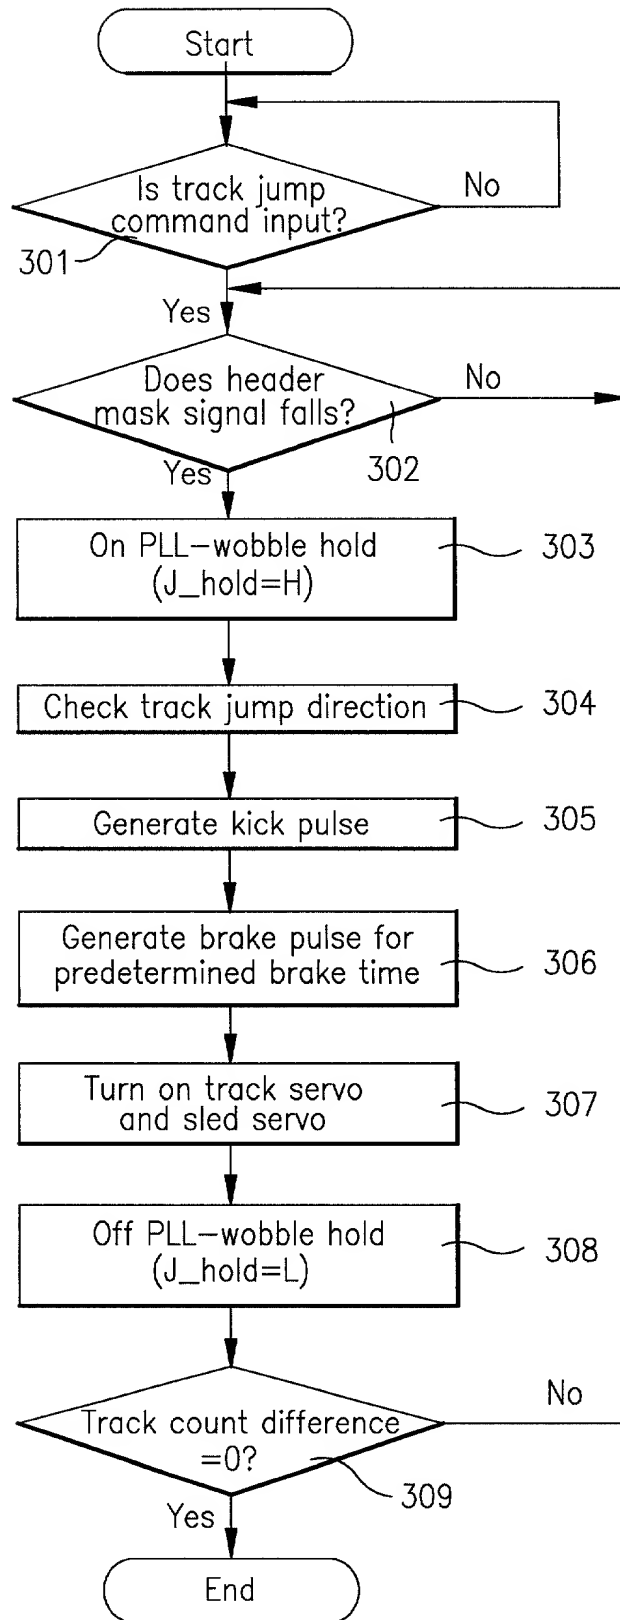


FIG.7

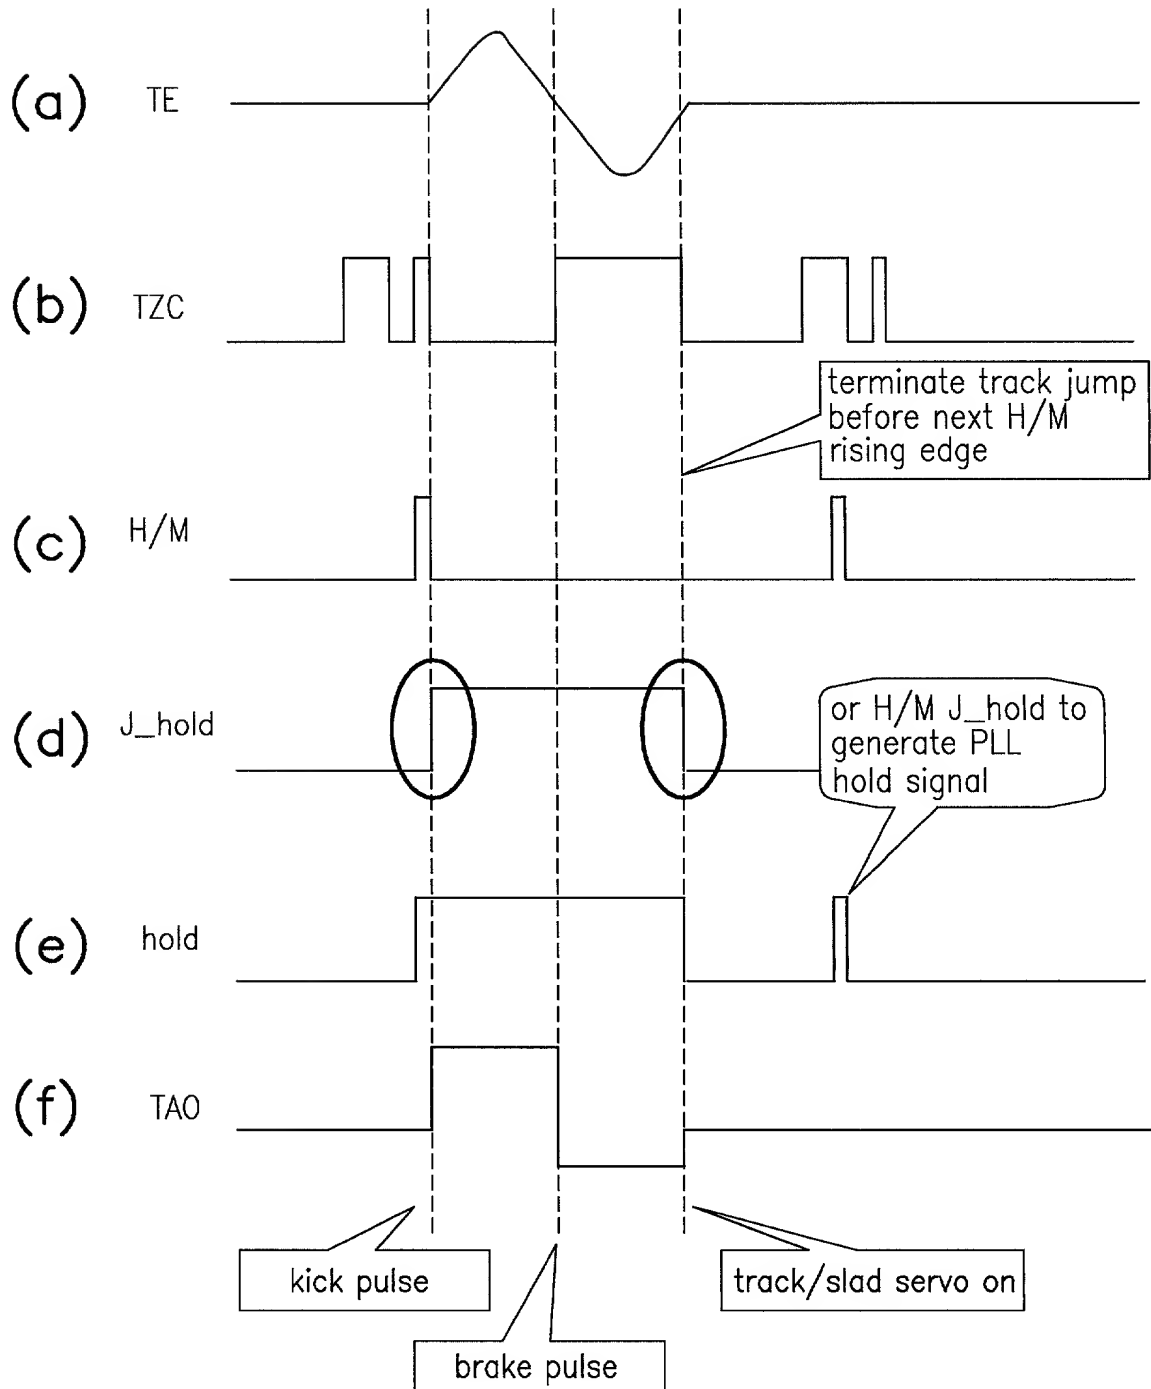


FIG.8

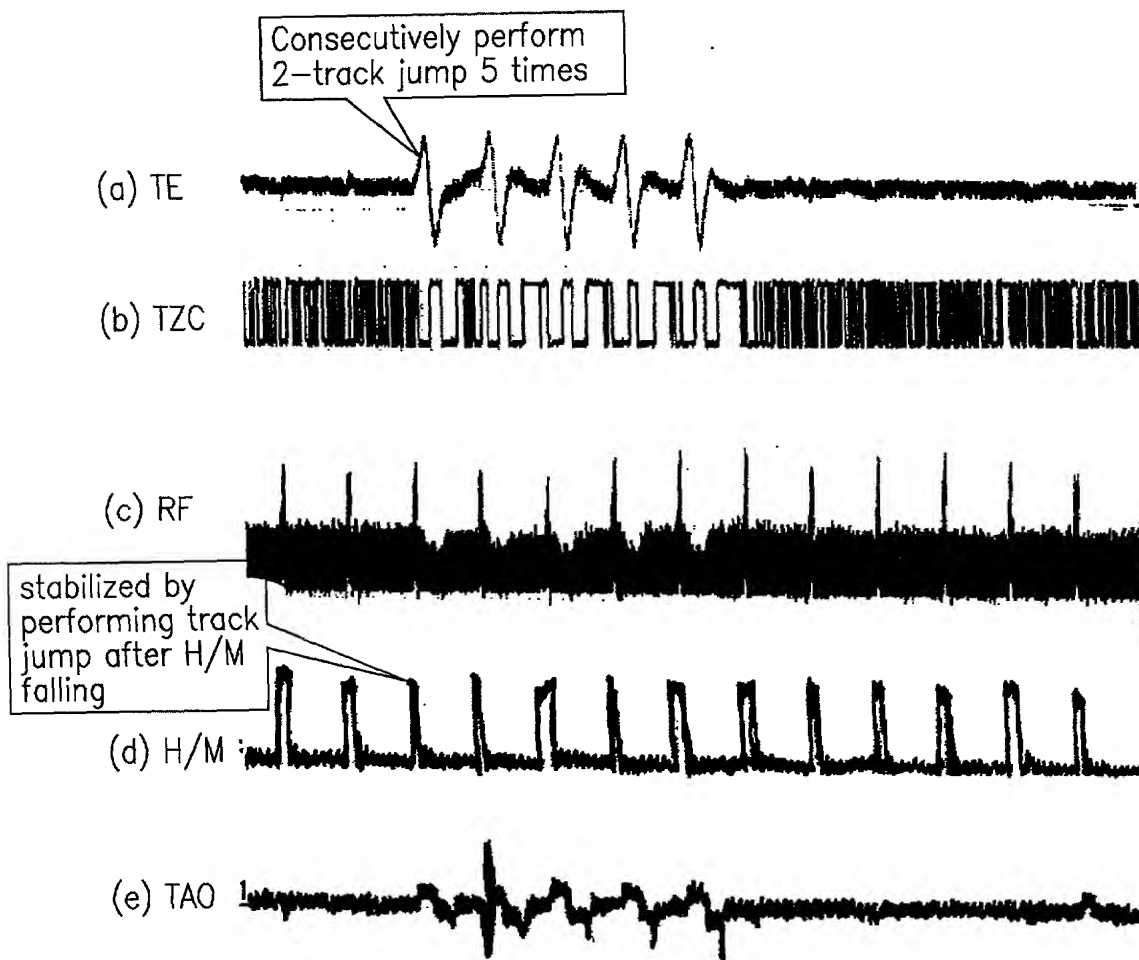


FIG.9

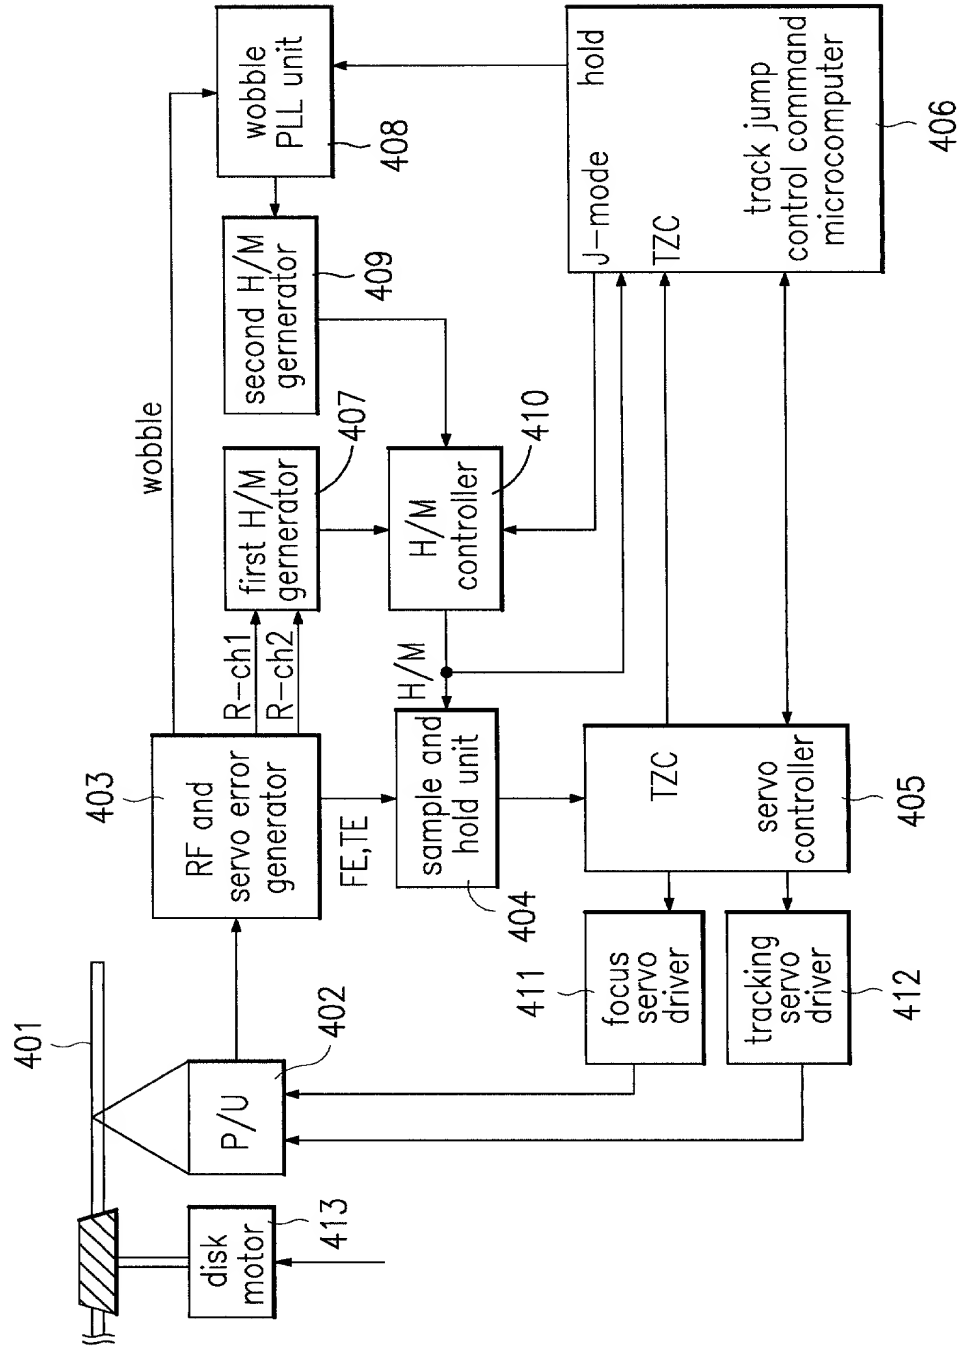


FIG.10


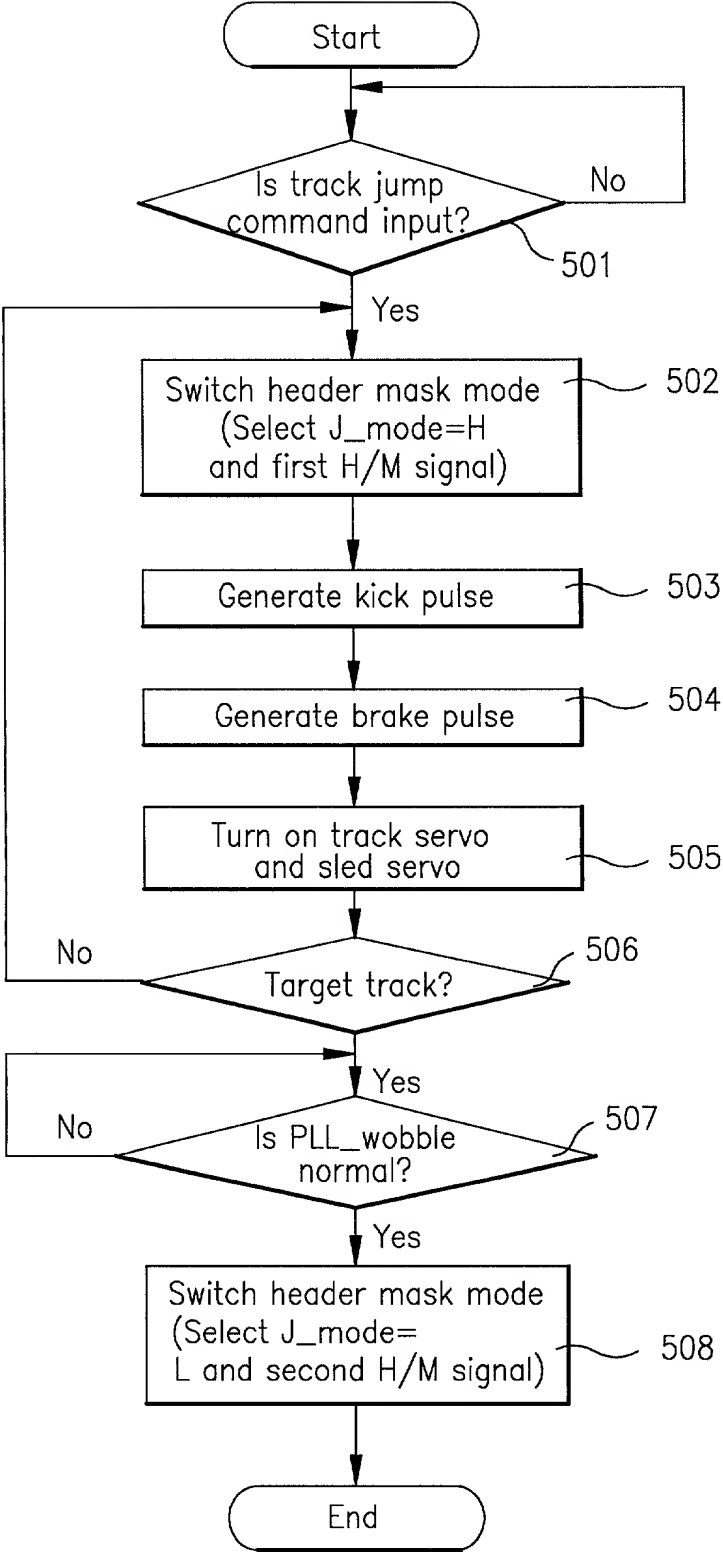


FIG.11

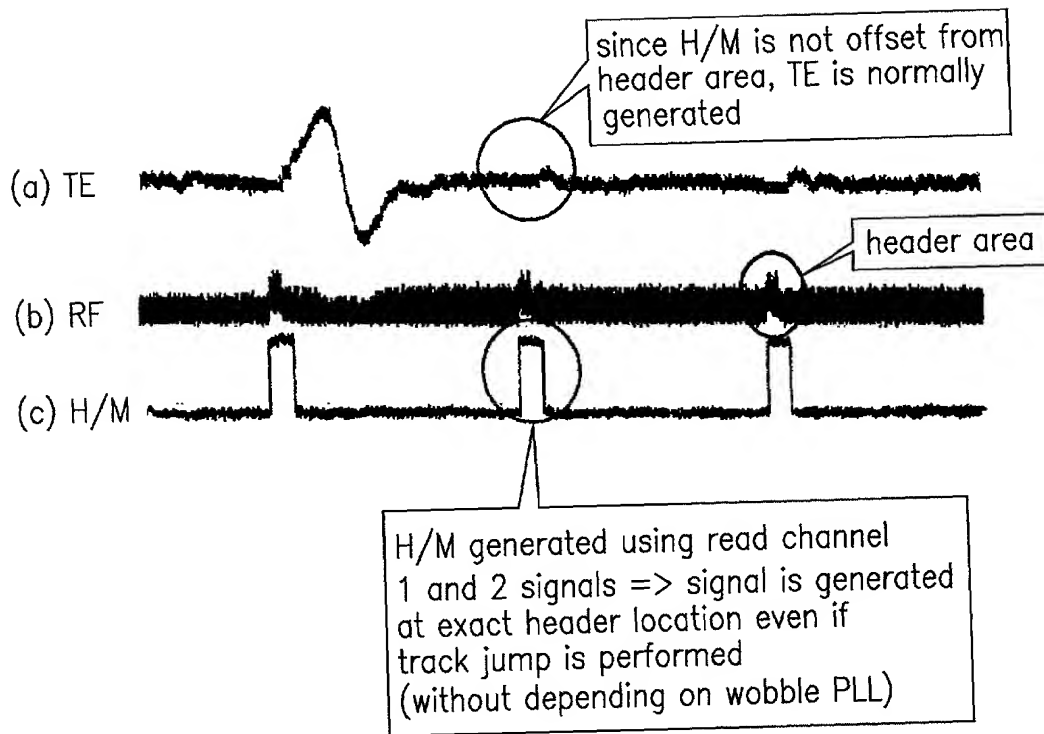

BIRCH, STEWART, KOLASCH & BIRCH, LLP

PLEASE NOTE:
YOU MUST
COMPLETE THE
FOLLOWING:

COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT AND DESIGN APPLICATIONS

ATTORNEY DOCKET NO.

0465-0719P

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one inventor is named below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Insert Title:

→ TRACK JUMP METHOD

Fill in Appropriate
Information -
For Use Without
Specification
Attached:

the specification of which is attached hereto. If not attached hereto,

the specification was filed on _____ as
United States Application Number _____; and /or

the specification was filed on _____ as PCT
International Application Number _____; and was
amended under PCT Article 19 on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (six months for designs) prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 (a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Insert Priority
Information:
(if appropriate)

→ Prior Foreign Application(s)

28978/1999

(Number)

Korea
(Country)

July/16/1999

(Month/Day/Year Filed)

Priority Claimed

☒ Yes ☐ No

28979/1999

(Number)

Korea
(Country)

July/16/1999

(Month/Day/Year Filed)

☒ Yes ☐ No

28980/1999

(Number)

Korea
(Country)

July/16/1999

(Month/Day/Year Filed)

☒ Yes ☐ No

(Number)

(Country)

(Month/Day/Year Filed)

☐ Yes ☐ No

(Number)

(Country)

(Month/Day/Year Filed)

☐ Yes ☐ No

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below

Insert Provisional
Application(s):
(if any)

→

(Application Number)

(Filing Date)

(Application Number)

(Filing Date)

All Foreign Applications, if any, for any Patent or Inventor's Certificate Filed More Than 12 Months (6 Months for Designs) Prior To The Filing Date of This Application:

Insert Requested
Information:
(if appropriate)

→

Country

Application No

Date of Filing (Month/Day/Year)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application

Insert Prior U.S.
Application(s):
(if any)

→

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)

I hereby appoint the following attorneys to prosecute this application and/or an international application based on this application and to transact all business in the Patent and Trademark Office connected therewith and in connection with the resulting patent based on instructions received from the entity who first sent the application papers to the attorneys identified below, unless the inventor(s) or assignee provides said attorneys with a written notice to the contrary:

Terrell C. Birch (Reg. No. 19,382)
Joseph A. Kolasch (Reg. No. 22,463)
Bernard L. Sweeney (Reg. No. 24,448)
Charles Gorenstein (Reg. No. 29,271)
Leonard R. Svensson (Reg. No. 30,330)
Andrew D. Meikle (Reg. No. 32,868)
Joe McKinney Muncy (Reg. No. 32,334)
C. Joseph Faraci (Reg. No. 32,350)

Raymond C. Stewart (Reg. No. 21,066)
James M. Slattery (Reg. No. 28,380)
Michael K. Mutter (Reg. No. 29,680)
Gerald M. Murphy, Jr. (Reg. No. 28,977)
Terry L. Clark (Reg. No. 32,644)
Marc S. Weiner (Reg. No. 32,181)
Andrew F. Reish (Reg. No. 33,443)
Donald J. Daley (Reg. No. 34,313)

Send Correspondence to:

BIRCH, STEWART, KOLASCH & BIRCH, LLP

P.O. Box 747 • Falls Church, Virginia 22040-0747

Telephone: (703) 205-8000 • Facsimile: (703) 205-8050

PLEASE NOTE:
YOU MUST
COMPLETE THE
FOLLOWING:

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First or Sole
Inventor:
Insert Name of Inventor
Insert Date This
Document is Signed

Insert Residence
Insert Citizenship

Insert Post Office
Address

Full Name of Second
Inventor, if any:

see above

Full Name of Third
Inventor, if any

see above

Full Name of Fourth
Inventor, if any

see above

Full Name of Fifth
Inventor, if any

see above

GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Seong	Pyo HONG	<i>Hong Seong Pyo</i>	July 10, 2000
Residence (City, State & Country)		CITIZENSHIP	
Seoul, Korea		Republic of Korea	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
Seaseoul APT., 304, 46 Panpo4-dong, Socho-gu, Seoul, Korea			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Sang	On PARK	<i>Park Sang-On</i>	July 10, 2000
Residence (City, State & Country)		CITIZENSHIP	
Kyonggi-do, Korea		Republic of Korea	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
813-501, 142, Kungok-dong, Pundang-gu, Songnam-shi, Kyonggi-do Korea			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Hyung	Jin JEON	<i>Jeon Hyung Jin</i>	July 10, 2000
Residence (City, State & Country)		CITIZENSHIP	
Seoul, Korea		Republic of Korea	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
KyongilVilla, C-203, 984-10, Taechi-dong, Kangnam-gu, Seoul, Korea			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			

* DATE OF SIGNATURE